

1 {{PRODNAME}}



3" /

Maximum liquid temperature: 35 °C
 : 0,15 m/sec: 35 °C
 : 20 °C
 : 998.2 kg/m³
 : 10700 rpm
 : 2 ³/
 : 88 m
 : CE,UL,CUL
 : ISO9906:2012 3B
 /
 DIN W.-Nr. 1.4301
 AISI 304
 /
 DIN W.-Nr. 1.4301
 AISI 304
 /
 Rp1 1/4
 : 76 mm
 /
 MSE3
 - 1: 1.65 kW - 2: 1.15 kW
 3: 1.13 kW
 1
 8.4 A
 (Cos phi): 1.00
 : 10700 rpm
 /
 (IEC 34-5): IP68
 (IEC 85): F



ПОМПЕН ОФИС

ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА

Email:

: Pump office Ltd.

: 0899898785

: service@pumpoffice.com

: 18.2.2021 .

: 1.5 m
: 96160855
:
: 5.5 kg
: 6.2 kg
: 0.01 m³
VVS : 388442485
RSK : 5853372
LVI : 4762532
NRF : 9041353
: MX
: 84137029



ПОМПЕН ОФИС

ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА

Email:


: Pump office Ltd.

: 0899898785




: service@pumpoffice.com

: 18.2.2021

SQE 2-85 50 Hz

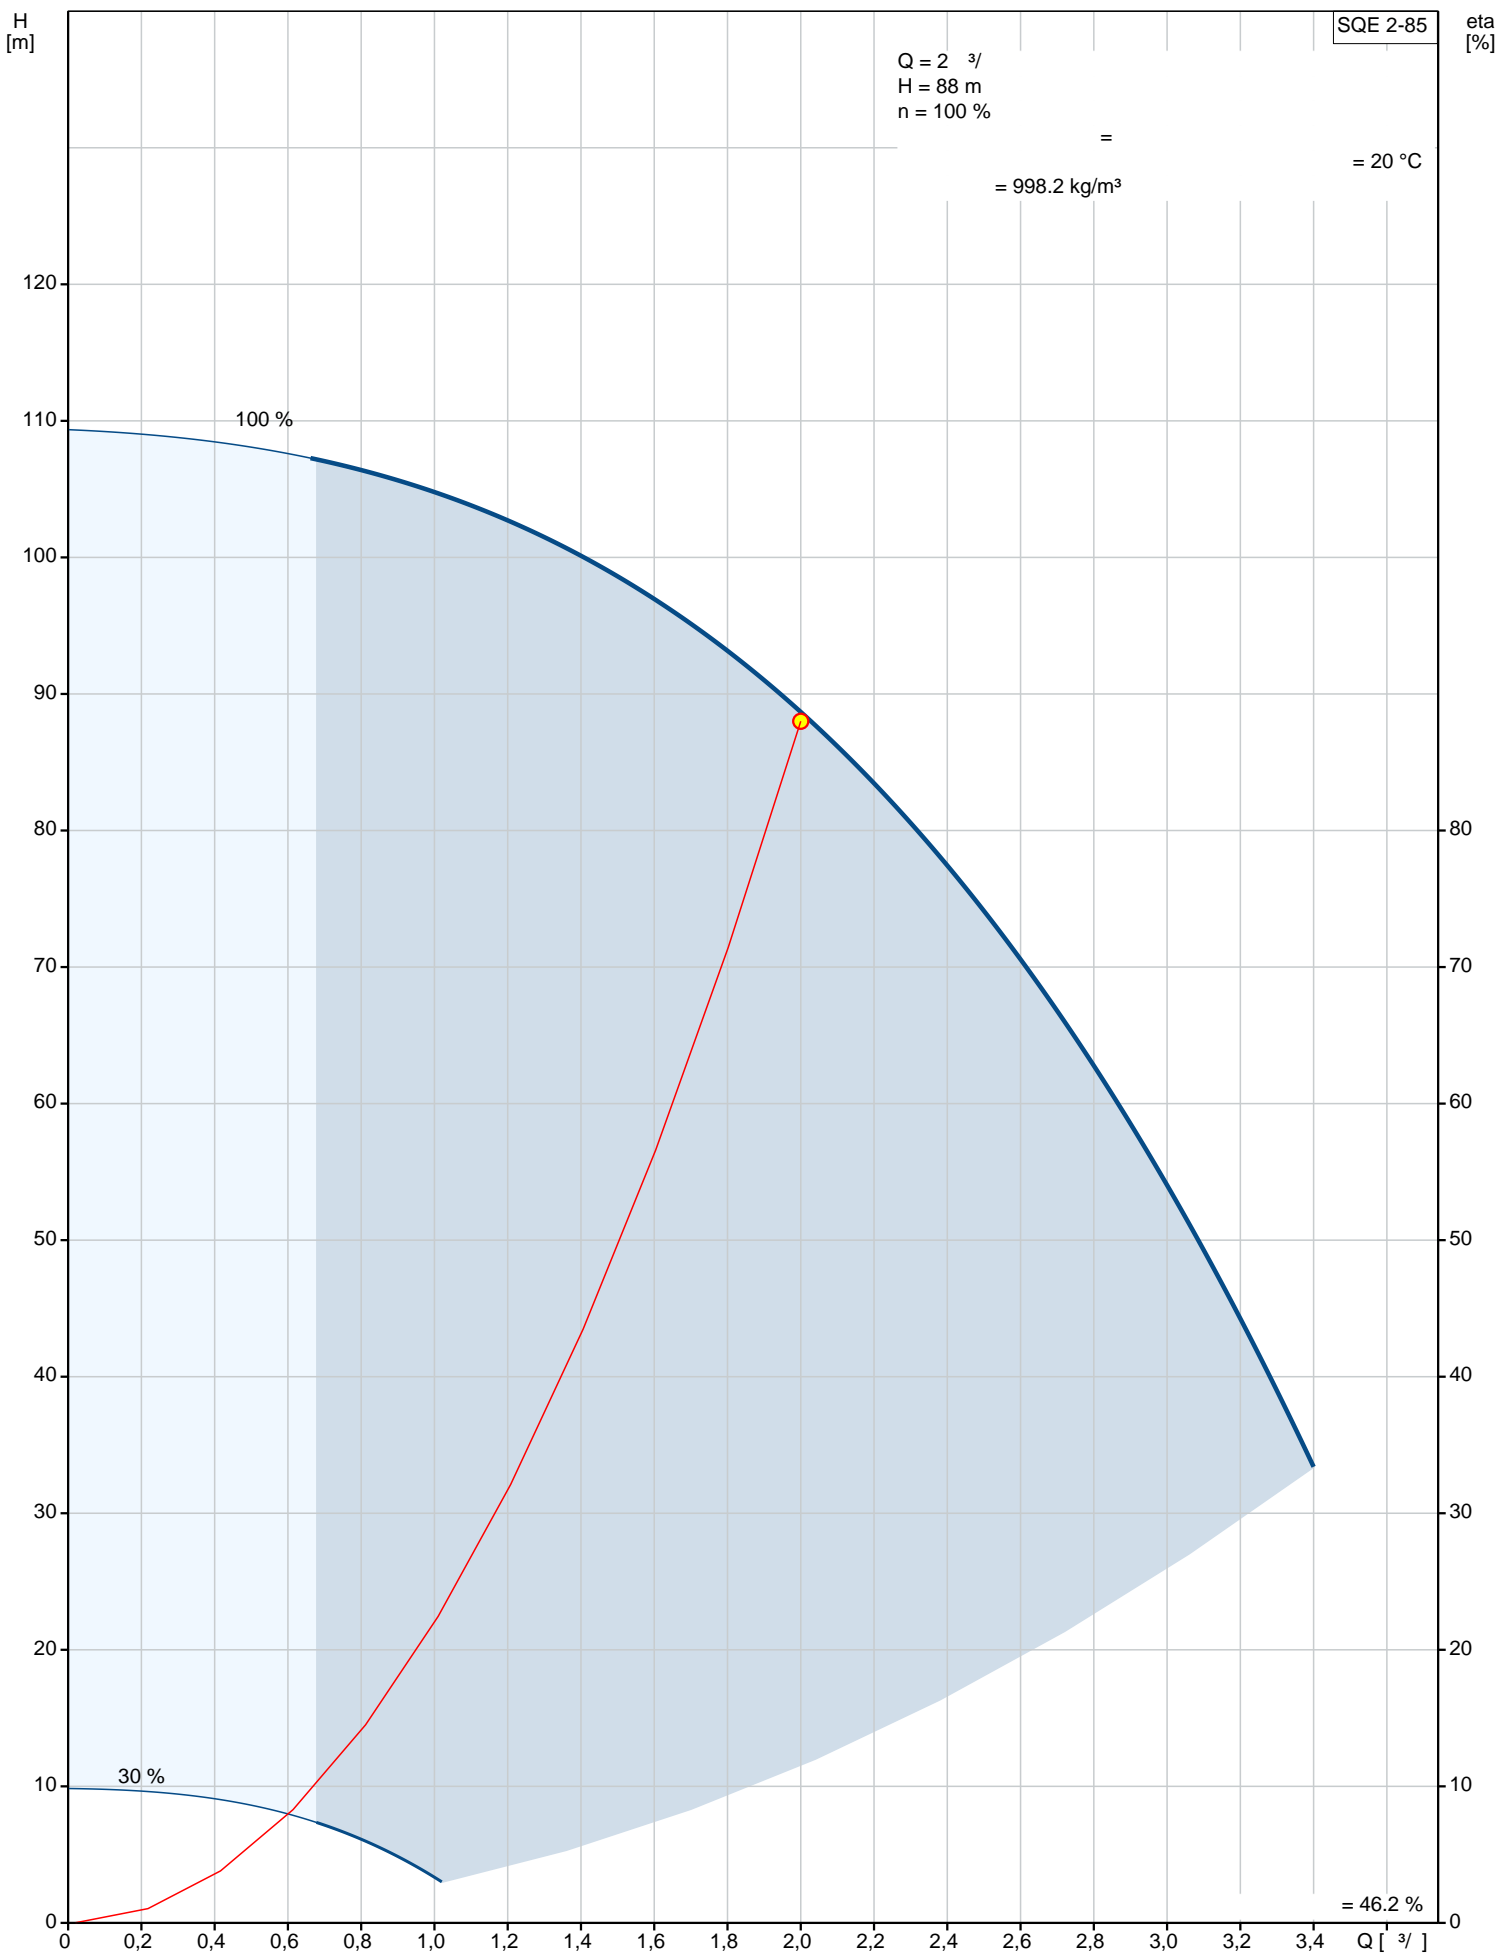

No.:	SQE 2-85	
EAN		
	10700 rpm	
	2 3/4"	
	88 m	
	5	
	CE,UL,CUL	
	ISO9906:2012 3B	
	96080395	
	B	
	/	
	DIN W.-Nr. 1.4301	
	AISI 304	
	DIN W.-Nr. 1.4301	
	AISI 304	
	Rp1 1/4	
	76 mm	
Maximum liquid temperature:	35 °C	
0,15 m/sec:	35 °C	
	20 °C	
	998.2 kg/m ³	
	MSE3	
- 1:	1.65 kW	
- 2:	1.15 kW	
3:	1.13 kW	
	1	
	8.4 A	
(Cos phi):	1.00	
	10700 rpm	
	(IEC 34-5): IP68	
	(IEC 85): F	
	Y	
	1.5 m	
	96160855	
CU 300/CU 301:	300/CU 301	CU
	5.5 kg	
	6.2 kg	
	0.01 m ³	
	EU/S-AMREG/APREG	
VVS	388442485	
RSK	5853372	
LVI	4762532	
NRF	9041353	
	MX	

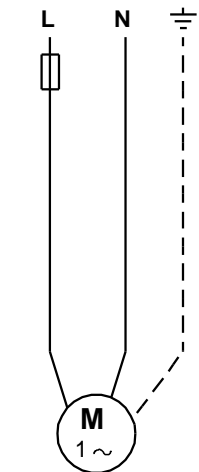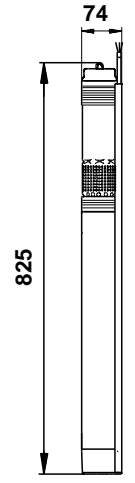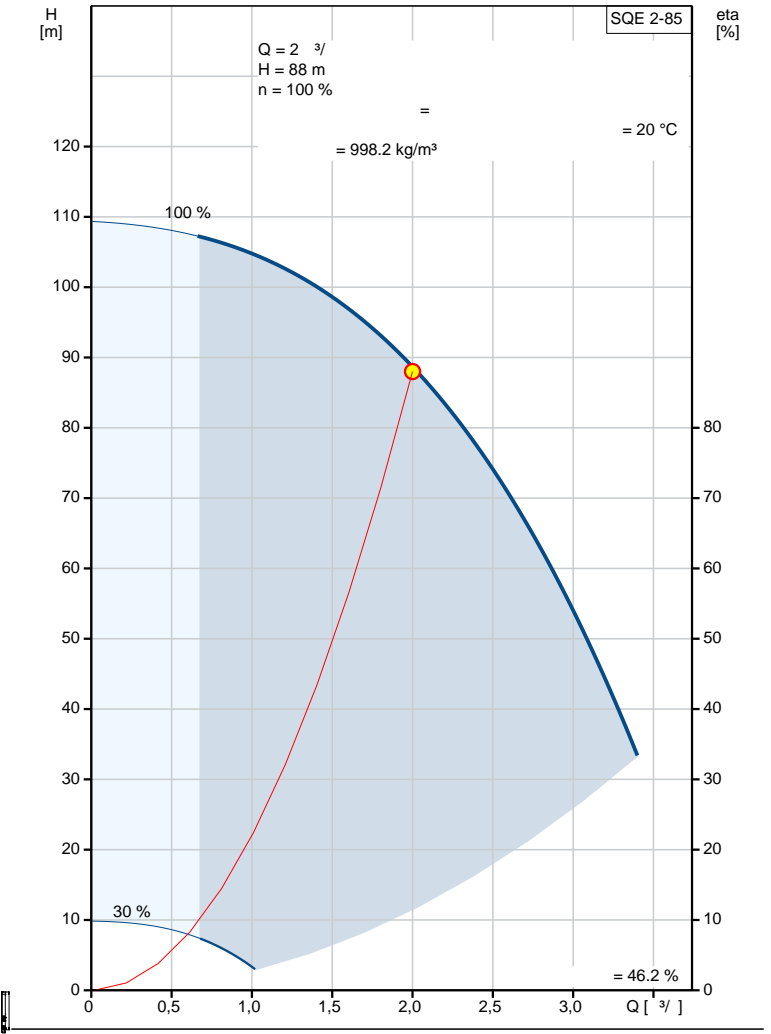



ПОМПЕН ОФИС

ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА

Email:

: Pump office Ltd.

: 0899898785

service@pumpoffice.com

18.2.2021 .

: 84137029



ПОМПЕН ОФИС

ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА

Email:


: Pump office Ltd.

: 0899898785

: service@pumpoffice.com

: 18.2.2021

SQE 2-85 50 Hz

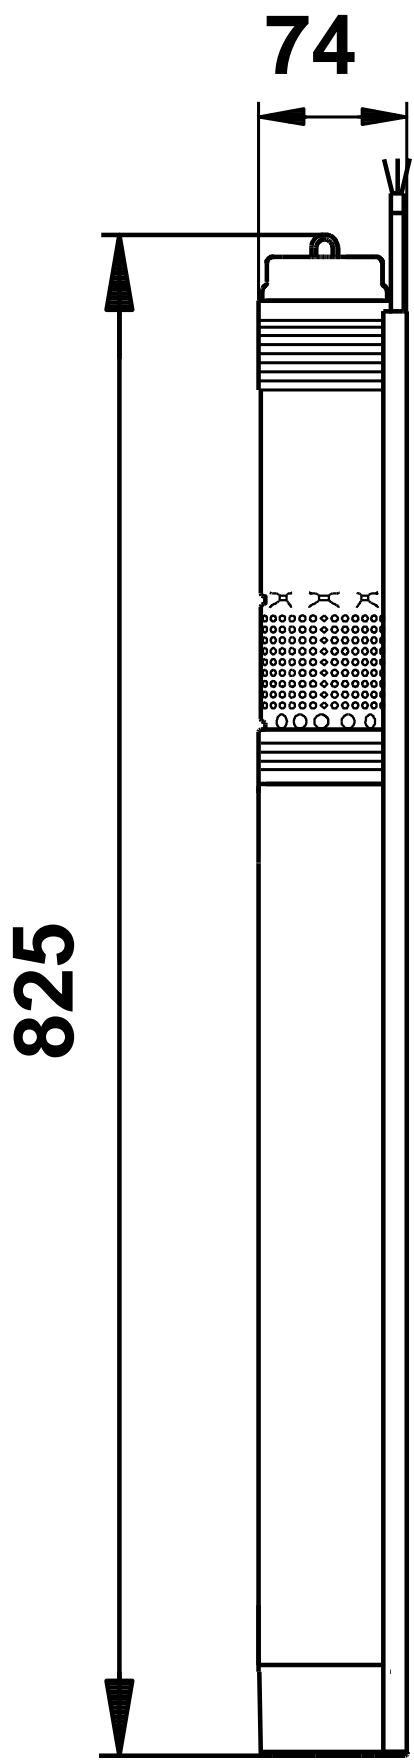

[mm],



ПОМПЕН ОФИС

ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА

Email:

: Pump office Ltd.

: 0899898785

: service@pumpoffice.com

: 18.2.2021

SQE 2-85 50 Hz

