Име на фирмата:	ПОМПЕН ОФИС ЕООД
Създадено от:	Pump Office LTD
Телефон:	0888881859
Email:	sales@pumpoffice.com
Дата:	10.06.2026 г.

Кол.	Описание
1	**COMFORT 15-14 B TDT**



Забележка! Показаната снимка може да се различава от реалната.

Продуктов номер: 93093537

COMFORT TDT is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps whether or not the system has mixing or tampering valves installed.

The pump features a compact housing and a permanent magnet with an integrated control unit.
The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system.
The drinking-water approved brass pump housing guarantees both safety and reliability.
COMFORT TDT moreover features a built-in temperature sensor to maintain precise water temperature.

The user-friendly interface features LEDs and pushbuttons on the operating panel. This offers an intuitive way of displaying and setting operating times and control modes and ensures a comfortable and energy-efficient experience for residential use.

The timer control mode enables the pump to operate continuously based on set operating times with the smallest time increment being 30 minutes.
In case of power failure, the timer pauses with no power reserve.
However, the selected operating times and current time are retained.
When power is restored, the pump resumes its last set operating state.
If the power outage exceeds 15 minutes, the current time may need to be reset.

The timer and temperature control mode enables the pump to operate based on set operating times and the functionalities of temperature mode, with operating times taking priority.
This means that the temperature mode is only active during the specified operating times.
This control mode automatically activates the pump when the internal temperature sensor detects that the water temperature drops below a certain level.
The control mode automatically adjusts the on and off temperatures based on the maximum temperature measured in the system.
The maximum temperature of the system is measured every 12 hours for 15 minutes, enabling dynamic adjustment of the on and off temperatures.


The product features:

- Q-H performance that is designed for single- and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout.
- Heat loss reduced by 56 % compared to continuously running pump.
- Low power consumption and silent operation.
- Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper and others.
- Drinking-water approved thanks to the brass pump housing, stainless-steel rotor and composite impeller.
- A design that makes it easy to remove limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements.


Кол.	Описание
1	• Dry-running protection to prevent failure if the system runs out of water. • Multiple installation positions, even with the pump head pointing downwards. • A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as Wilo, Vortex, Lowara, DAB and others). • Easy electrical installation with a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire. • Insulating shells for heat loss reduction. • Non-return and shut-off valves included in ""BX"" variant, reducing installation cost. • An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional permanent venting valve. • Optional fittings for pipe connections of different sizes and types. • Optional non-return and shut-off valves are available.

Име на фирмата: ПОМПЕН ОФИС ЕООД
Създадено от: Pump Office LTD
Телефон: 0888881859
Email: sales@pumpoffice.com
Дата: 10.06.2026 г.

93093537 COMFORT 15-14 B TDT

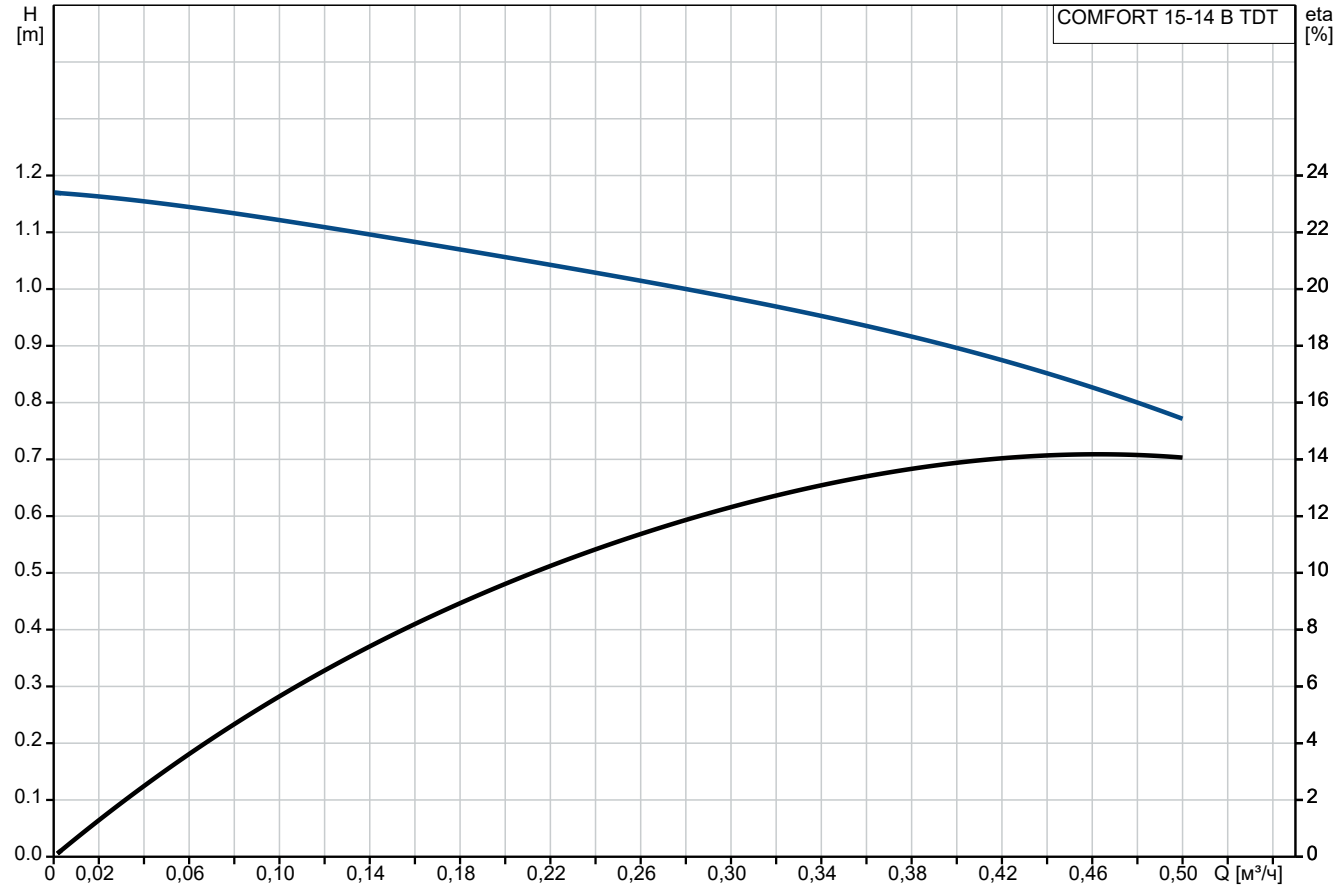

Изпомпвана течност = Вода
Температура на течността по време на работа = 20 °C
Плътност = 998.2 kg/m³

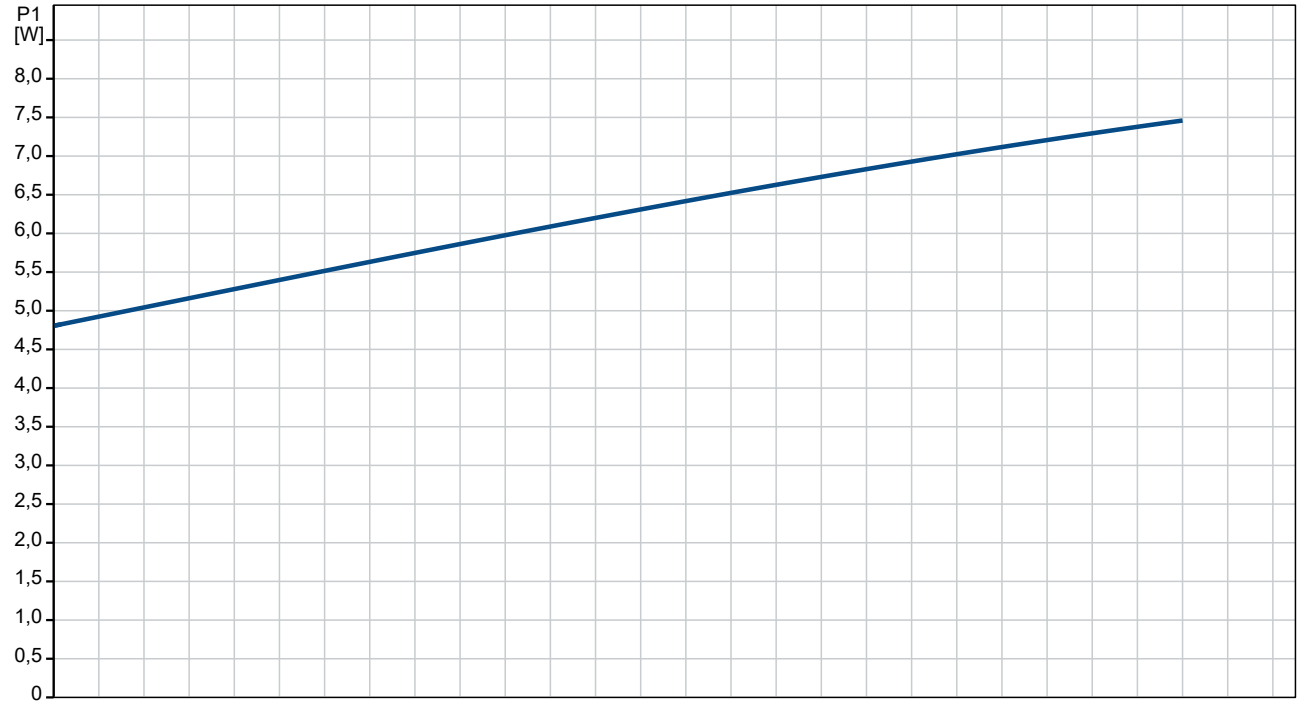


POMPITE.bg
ПОМПИ ХИДРОФОРИ АРМАТУРА АВТОМАТИКА


Име на фирмата: ПОМПЕН ОФИС ЕООД
Създадено от: Pump Office LTD
Телефон: 0888881859
Email: sales@pumpoffice.com


Дата: 10.06.2026 г.


Описание	Стойност
Обща информация:	
Име на продукт:	COMFORT 15-14 B TDT
Продукт No.:	93093537
EAN номер:	5715467675740
Технически:	
Скорост No:	1
Номинален дебит:	0.45 м³/ч
Номинален напор:	0.9 m
Максимален напор:	14 dm
Температурен клас на флуида:	95
Одобрения:	CE,VDE,EAC,WEEE
Материали:	
Помпен корпус:	Месинг
	CuZn39Pb3, MS58
Работно колело:	Композит
	PPO-GF20/Stainless steel
Инсталиране:	
Минимална околна температура:	0 °C
Максимално работно налягане:	10 bar
Стандарт за тръбните връзки:	ISO 228-1
Тип връзка:	Rp
Размер на връзката:	1/2 inch
Номинални налягания за тръбните връзки:	PN 10
Разстояние между входния и изходния фланец:	80 mm
Течност:	
Работен флуид:	Вода
Диапазон на температурата на течността:	2 .. 95 °C
Избрана температура на течността:	20 °C
Плътност:	998.2 kg/m³
Електрич. данни:	
Максимална входна мощност:	7 W
Основна честота:	50 / 60 Hz
Номинално напрежение:	1 x 230 V
Ток при скорост 3:	0.07 A
Степен на зашитеност (IEC 34-5):	IP44
Изолационен клас (IEC 85):	F
Стандарт за Ex-защита:	ELECT.
Термична защита:	Защита, импеданс
Контроли:	
Режимът на работа включва:	Timer
Други:	
Нетно тегло:	0.94 kg
Брутно тегло:	1.04 kg
Обем за спедиране:	0.003 m³
Датски VVS номер:	380636004
Шведски RSK номер:	5792023
Норвежки NRF номер:	1383193
Страна на произход:	DE
Митнически тарифен номер:	84137030

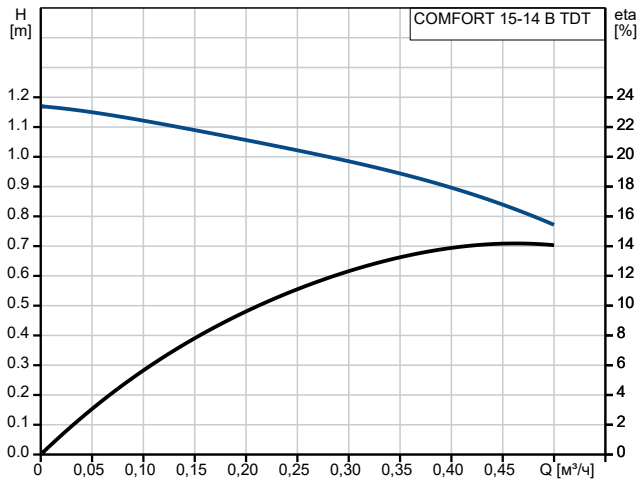

Изпомпвана течност = Вода
Температура на течността по време на работа = 20 °C
Плътност = 998.2 kg/m³

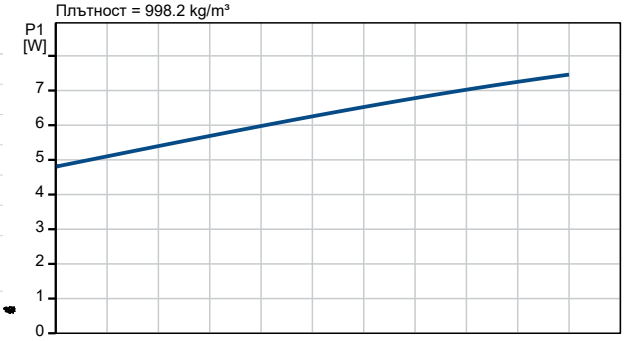


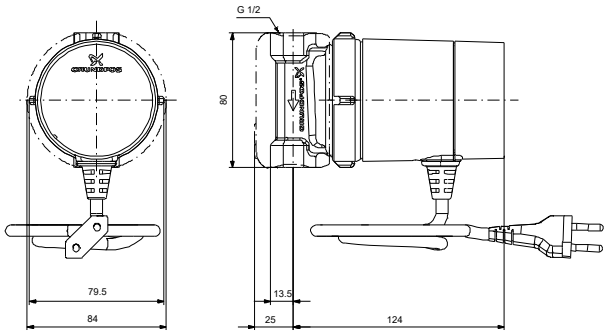


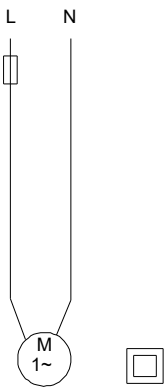

Име на фирмата: ПОМПЕН ОФИС ЕООД
Създадено от: Pump Office LTD
Телефон: 0888881859
Email: sales@pumpoffice.com
Дата: 10.06.2026 г.

93093537 COMFORT 15-14 B TDT

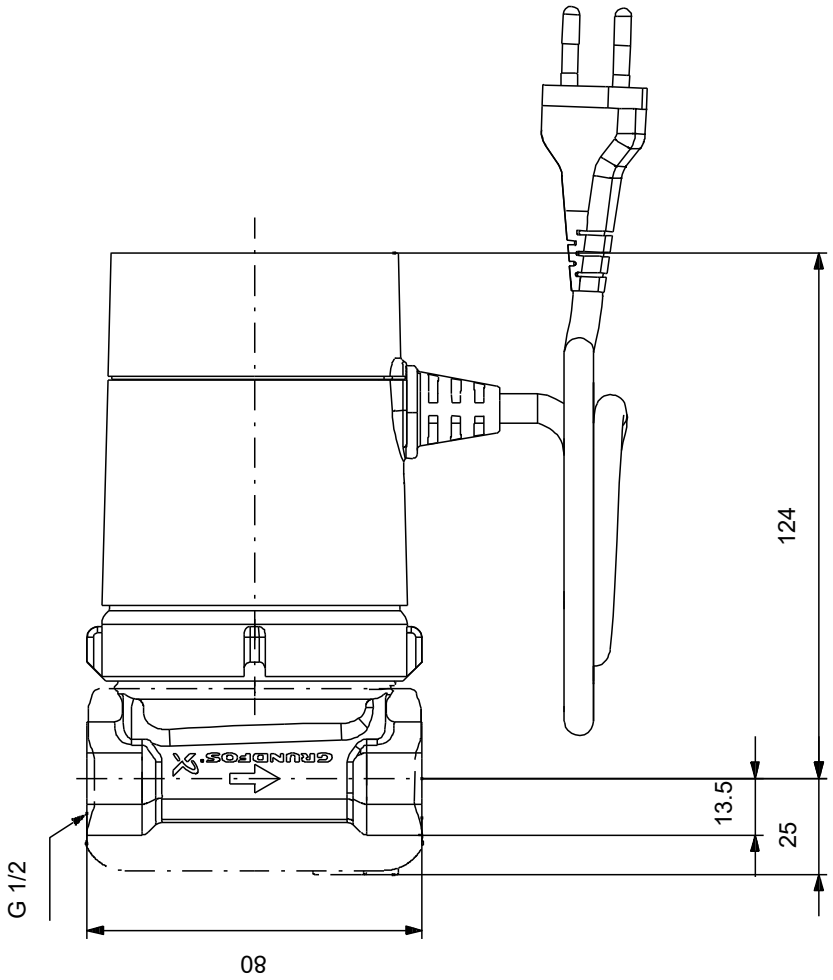


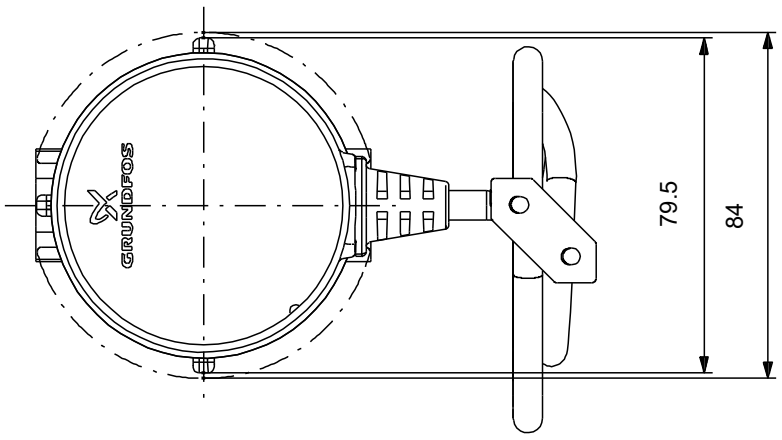

Забележка! Всички стойности са в [mm], освен ако е посочено друго.
Опровержение: Този опростен оразмерителен чертеж не показва всички детайли.

Име на фирмата: ПОМПЕН ОФИС ЕООД
Създадено от: Pump Office LTD
Телефон: 0888881859
Email: sales@pumpoffice.com
Дата: 10.06.2026 г.

93093537 COMFORT 15-14 B TDT

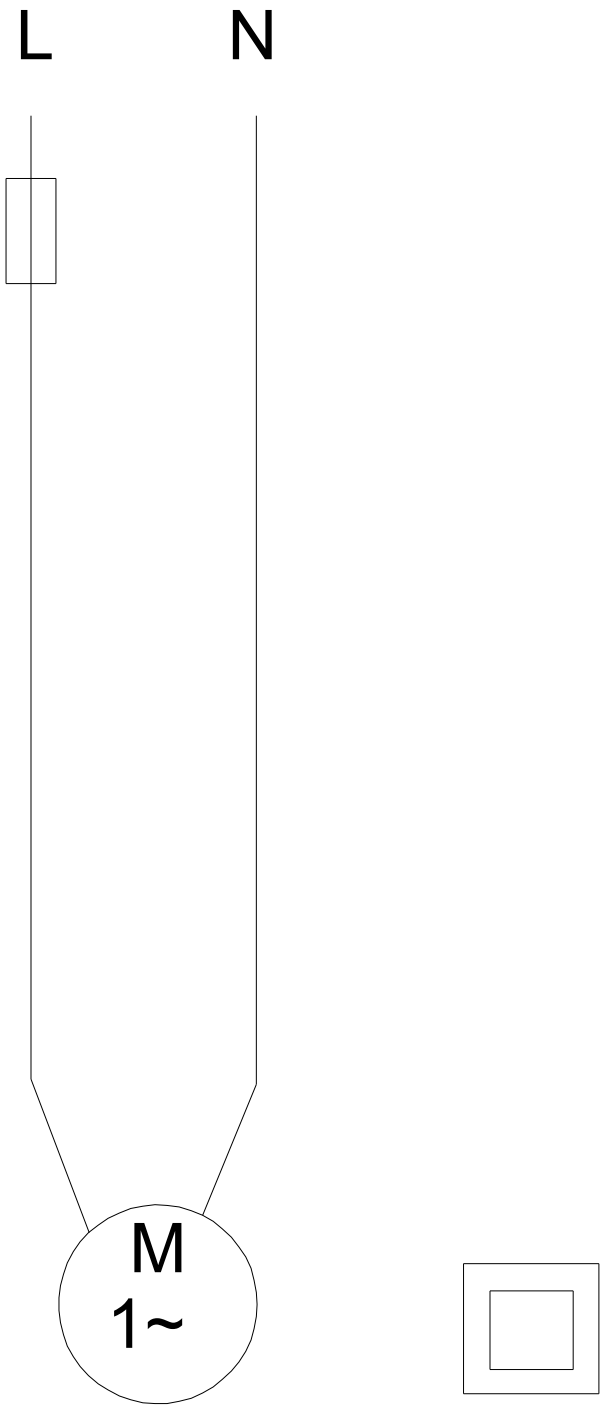

Забележка! Всички размери са в [mm], освен ако не е означено друго.