

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60213265H

Customer pos. no.:

Model :

Jet 82 1x230 50 IE2 No Cable

Pump data

Pressure rating : 600 kPa
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Priming capacity :

H m	2	3	4	5	6	7	8	9
Q m³/h	3.06	2.76	2.46	2.28	1.92	1.74	1.32	1.02

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa

Hydraulic data (duty point)

Flow :
Head :



Materials

Pump body Cast iron 200 UNI ISO 185
Support Die cast aluminium
Impeller Technopolymer A
Mechanical seal Carbon/Ceramic
O-Ring NBR Rubber
Shaft with rotor AISI 416 X12 CrS 13 UNI 6900/71
Nozzle venturi diffuser assembly Technopolymer A

Motor data

Motor brand : DAB
Max. Power input P1 : 0.85 kW
Nominal power P2 : 0.55 kW
Rated speed : 2800 1/min
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 3.9 A
Degree of protection : IP 44

Curve tolerance according to ISO 9906

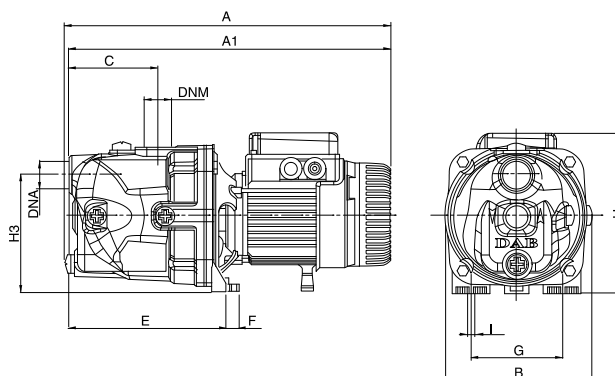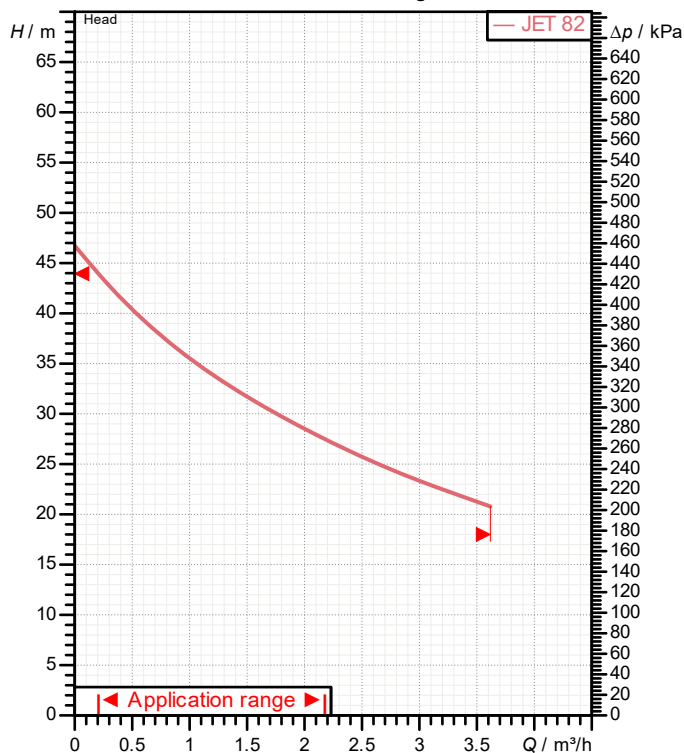

Dimensions in mm

A	395	DNA	1" G	G	111		
A1	395	DNM	1" G	H	193		
B	178	E	192	H3	144		
C	108	F	14	I Ø	9		

Weight : 10.7 kg

Pump connection


Suction side : 1" G / 600 kPa
Discharge side : 1" G / 600 kPa

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Jet 82 1x230 50 IE2 No Cable

Curve tolerance according to ISO 9906

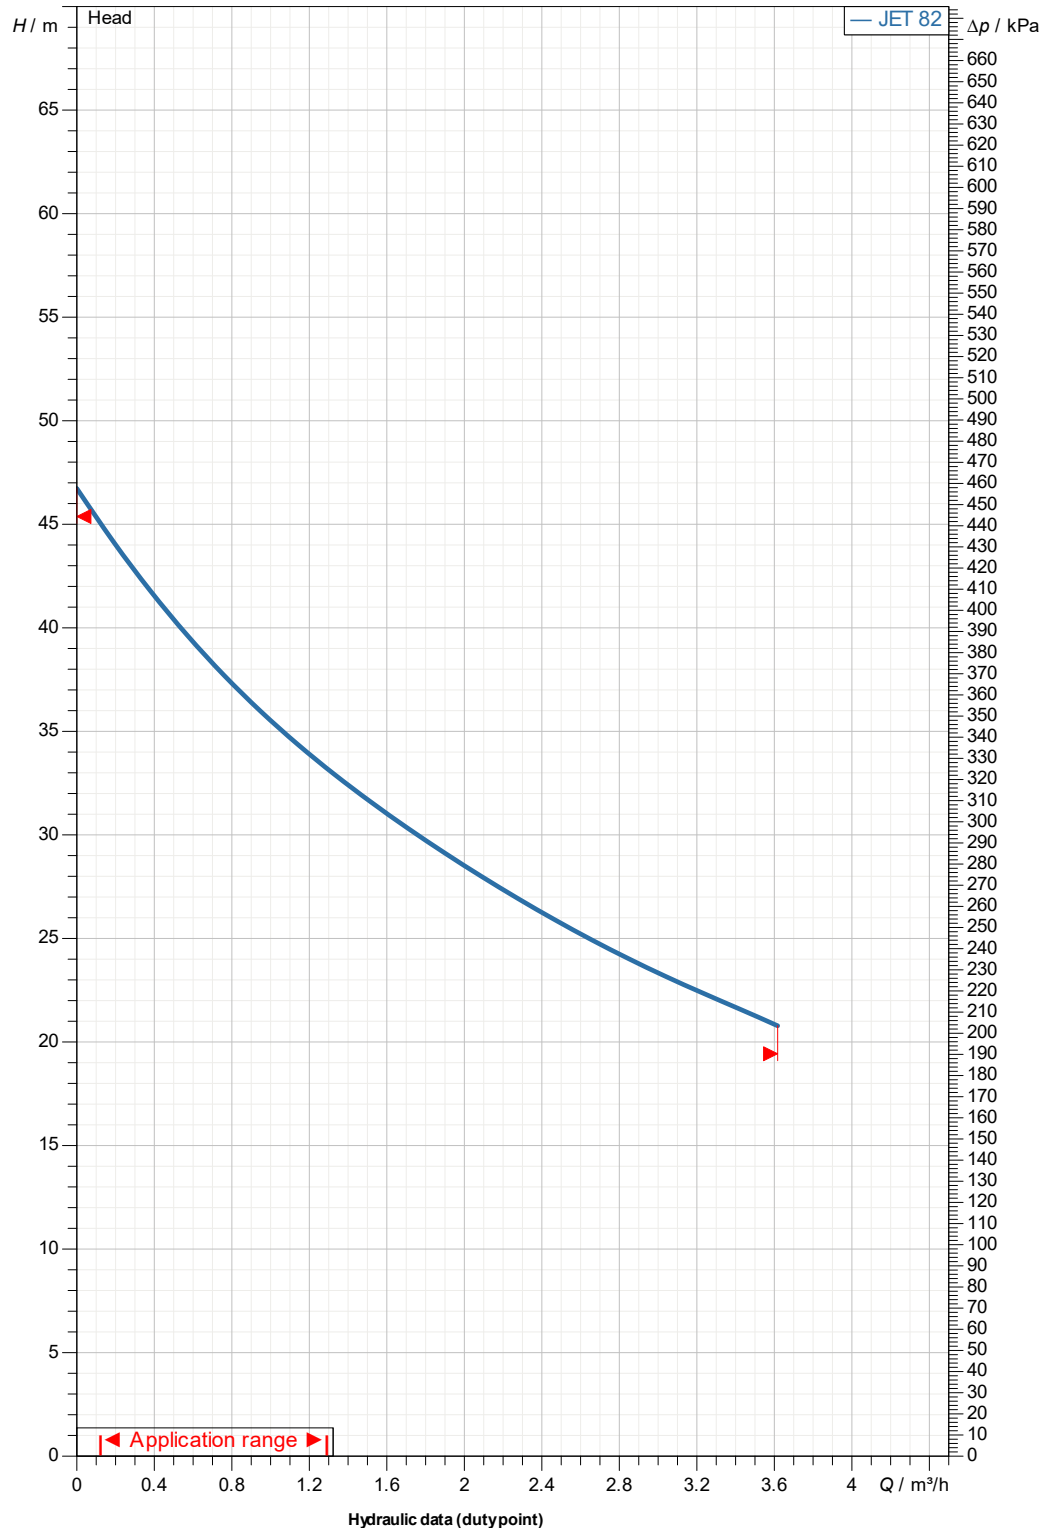

Suction side :
1" G
600 kPa

Discharge side :
1" G
600 kPa

Flow :

Head :

Rated speed :
2800 1/min

Project

Project ID


Created by

Created on

2026-07-03

Receiver

Company
Reference
Address
Phone
Fax
E-mail

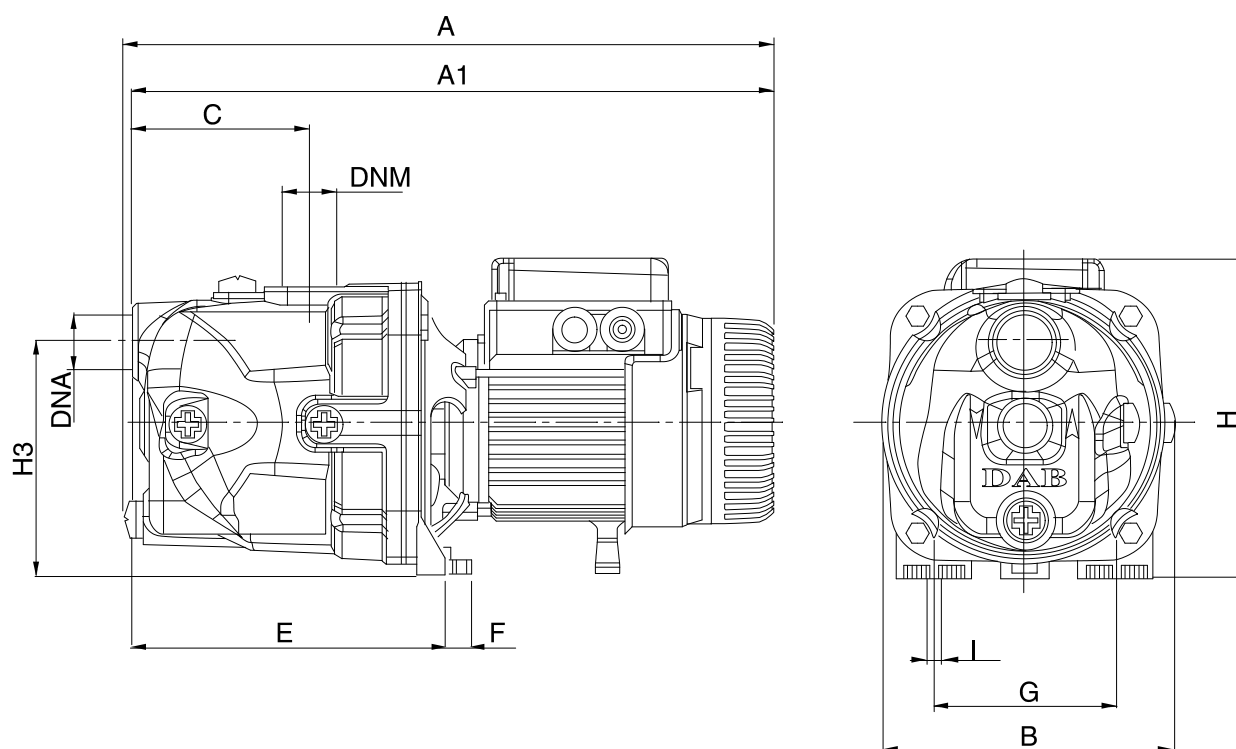Jet 82 1x230 50 IE2 No Cable

Dimensions in mm							Pump connection
1	A	395	I Ø	9			Suction 1 " G 600 kPa Discharge 1 " G 600 kPa
2	A1	395					
3	B	178					
4	C	108					
5	DNA	1" G					
6	DNM	1" G					
7	E	192					
8	F	14					
9	G	111					
10	H	193					
11	H3	144					
Project			Project ID			Created by	Created on 2026-07-03