

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60172219H

Customer pos. no.:

Model :

NOVAIR 200 M-NA 10m cable

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 2.34 kPa

Hydraulic data (duty point)



Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
O-Ring	NBR 70
Motor shaft	AISI 416
Ceramic bushing	AISI 303 + Ceramic
Motor casing	Stainless Steel (AISI 304)
Radial seal	NBR 70

Curve tolerance according to ISO 9906

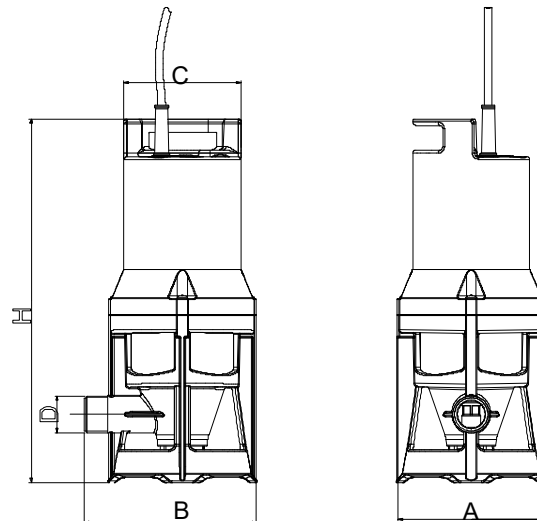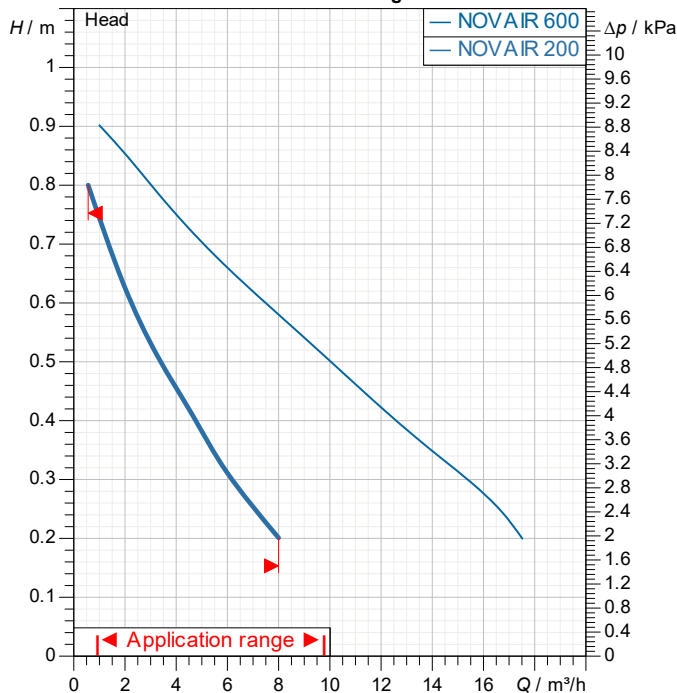

Motor data

Motor brand : DAB

Max. Power input P1 : 0.28 kW

Nominal power P2 : 0.18 kW

Rated voltage : 1~ 220-240 V

Nominal current : 1.4 A

Number of poles : 2

Rated speed : 2850 1/min

Degree of protection : IP 68

50 Hz

Weight :

3.5 kg

Dimensions in

mm

A	130.5				
B	158				
C	Ø 106				
D	1" G				
H	329.5				

Pump connection

Suction side :

/

Discharge side :


/

Receiver

Company
Reference
Address
Phone
Fax
E-mail

NOVAIR 200 M-NA 10m cable

Curve tolerance according to ISO 9906

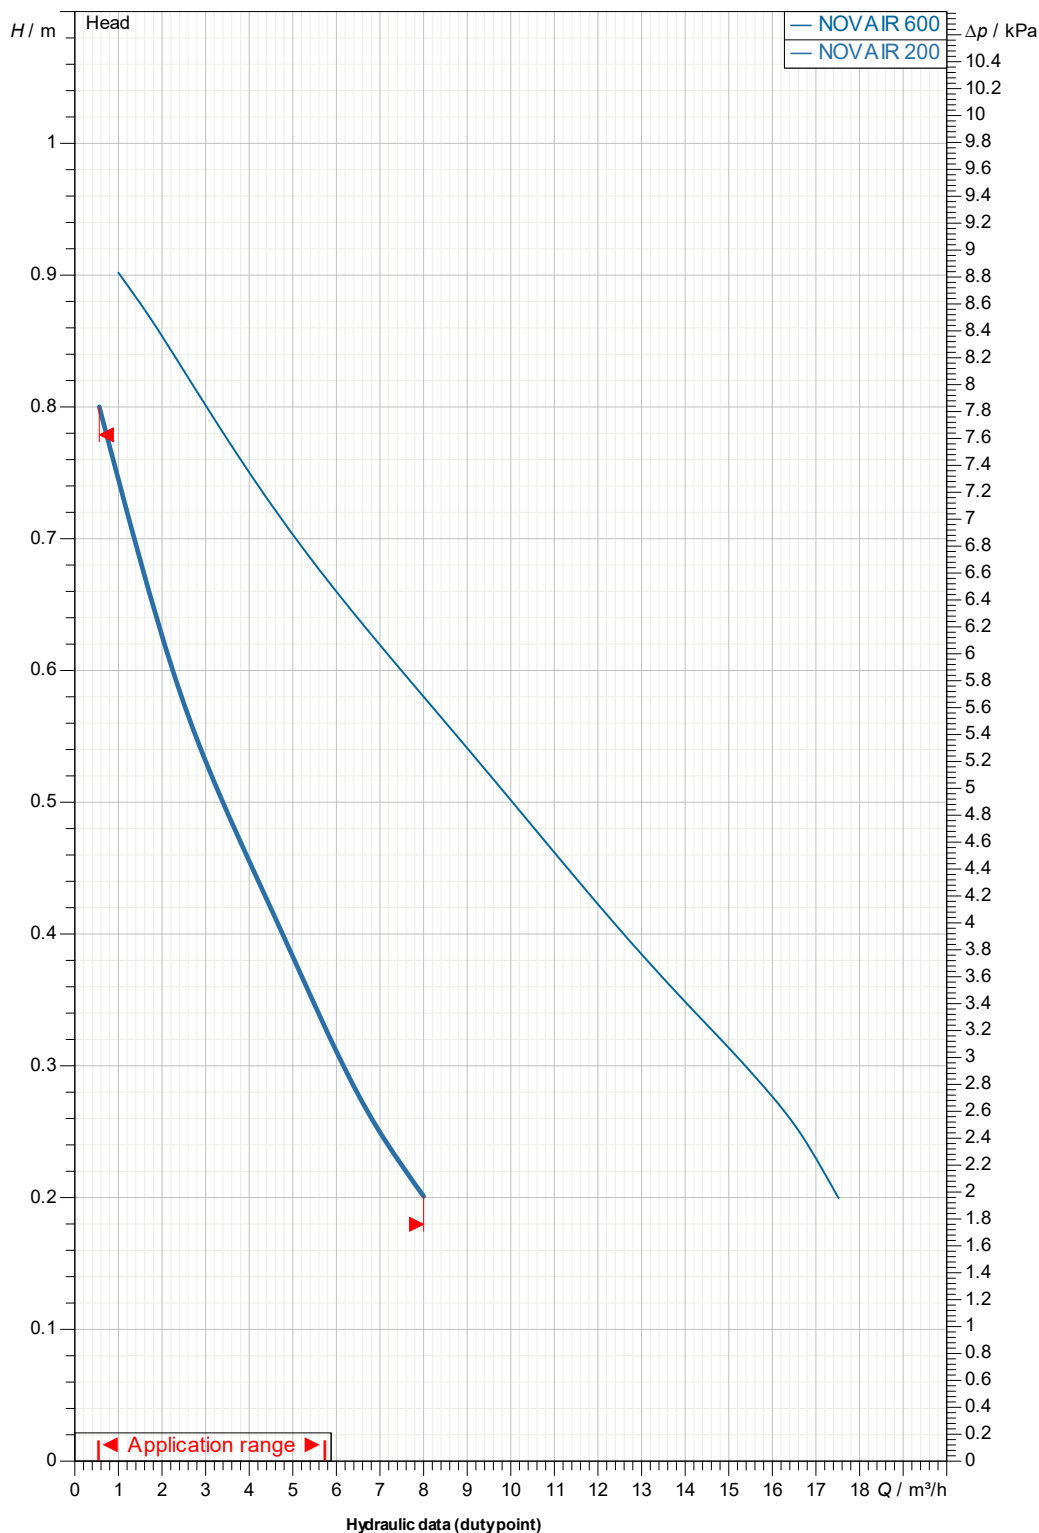

Suction side :

Discharge side :

Flow :

Head :

Rated speed :

2850 1/min

Project

Project ID



Created by

Created on

2026-07-14

Company
Reference
Address
Phone
Fax
E-mail

NOVAIR 200 M-NA 10m cable

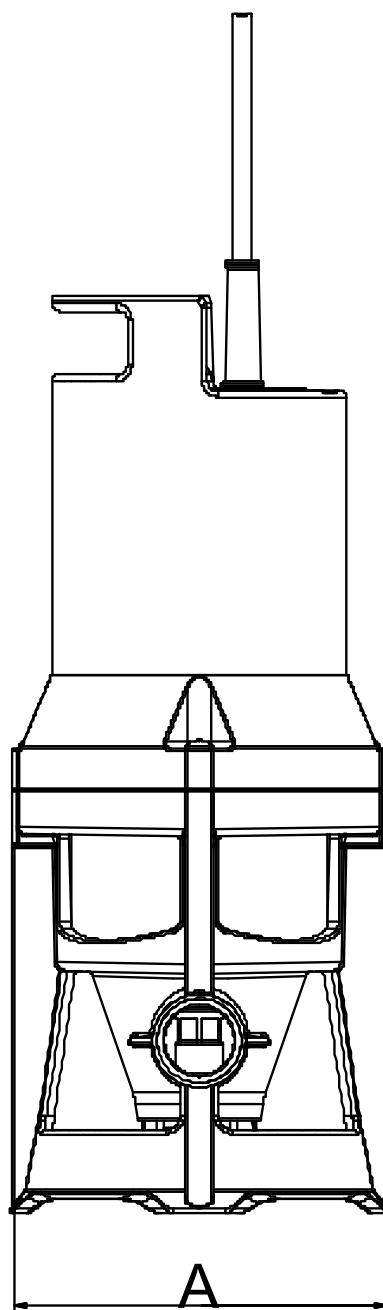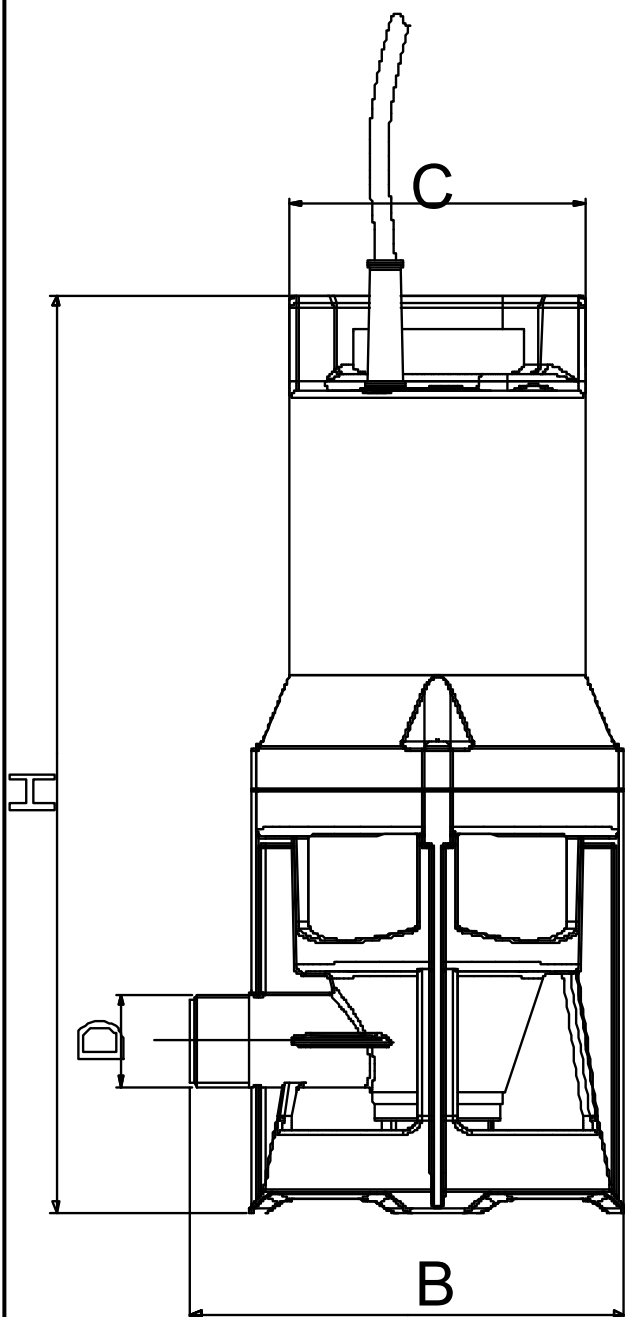

Dimensions in mm							Pump connection	
1	A	130.5					Suction	
2	B	158						
3	C	Ø 106						
4	D	1" G						
5	H	329.5						
6							Discharge	
7								
8								
9								
10								
11								
Project			Project ID			Created by		Created on 2026-07-14