

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :
60219349H

Customer pos. no.:

Model :
FEKA VS 900 M - A

Pump data

Free passage : 50 mm
Pressure rating :
Min. fluid temperature : 0
Max. fluid temperature : 50 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa



Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body : Stainless Steel AISI 304
Impeller : Stainless Steel AISI 304
Motor casing : Stainless Steel AISI 304
Mechanical seal pump side : Silicon carbide/Silicon carbide
Mechanical seal motor side : Carbon/Alumina
Motor shaft pump side : Stainless Steel AISI 316
Motor shaft motor side : Steel C10

Curve tolerance according to ISO 9906

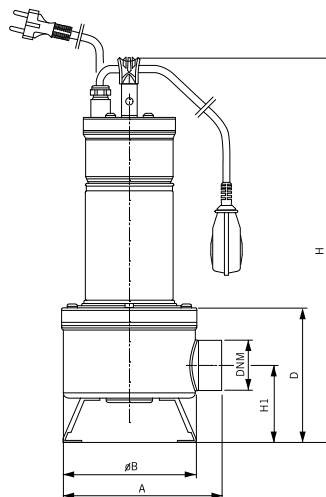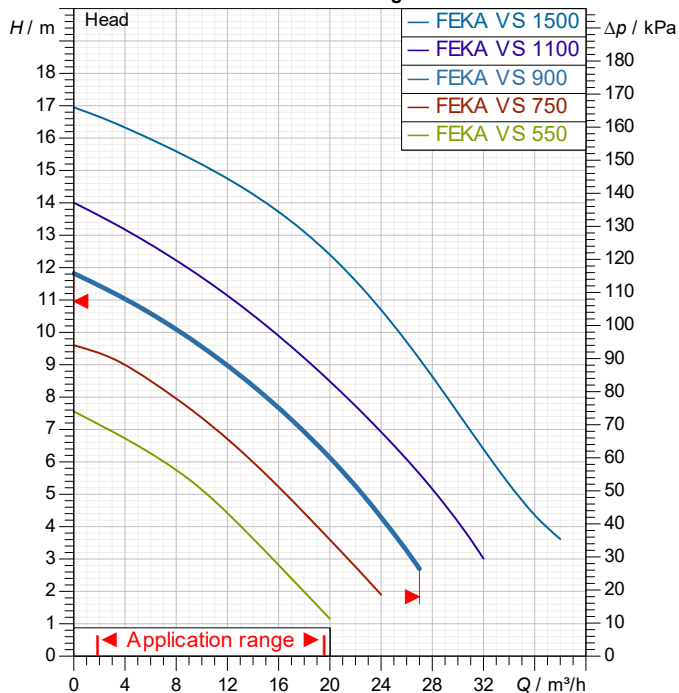

Motor data

Motor brand : DAB
Max Power input P1 : 1.35 kW
Nominal power P2 : 0.9 kW
Rated speed : 2800 1/min
Rated voltage : 1~ 220-240 V
Nominal current : 6.3 A
Degree of protection : IP 68

Weight : 15.6 kg

Dimensions in mm

A	203				
B	170				
D	172				
DNM	2" F				
H	515				
H1	98				

Pump connection


Suction side : /
Discharge side : 2" GAS / --

Receiver

Company
Reference
Address
Phone
Fax
E-mail

FEKA VS 900 M - A

Curve tolerance according to ISO 9906

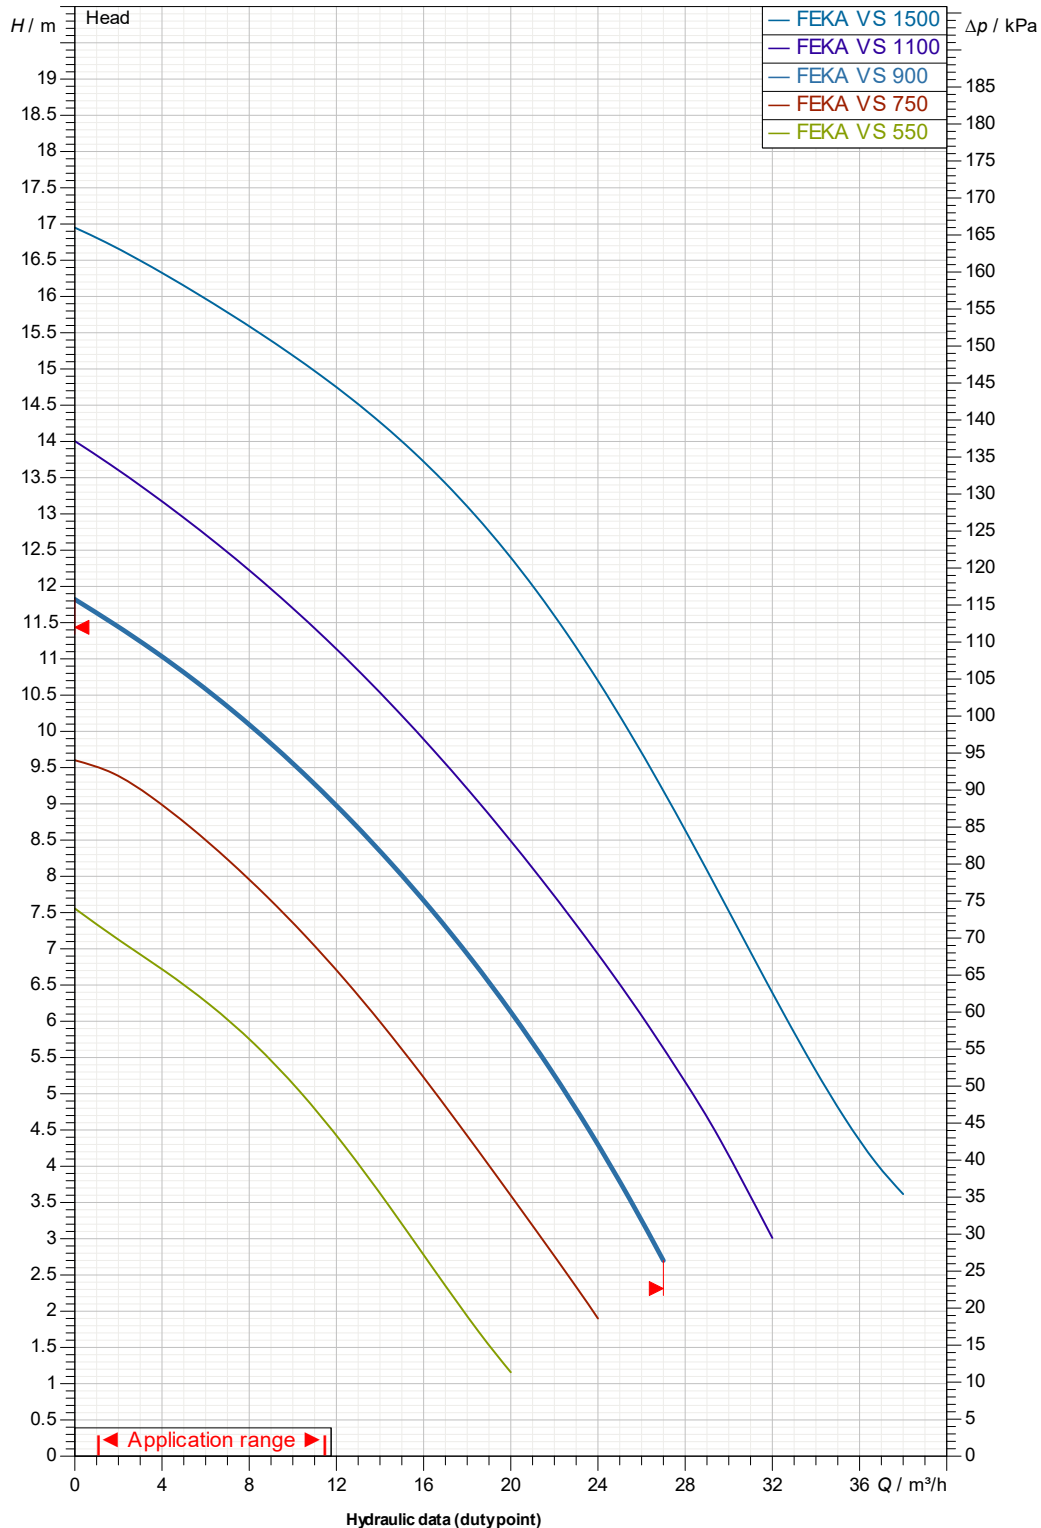

Suction side :

Discharge side :
2" GAS
--

Flow :

Head :

Rated speed :
2800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_


ISSUE_DATE

2026-08-27

Receiver

Company
Reference
Address
Phone
Fax
E-mail

FEKA VS 900 M - A

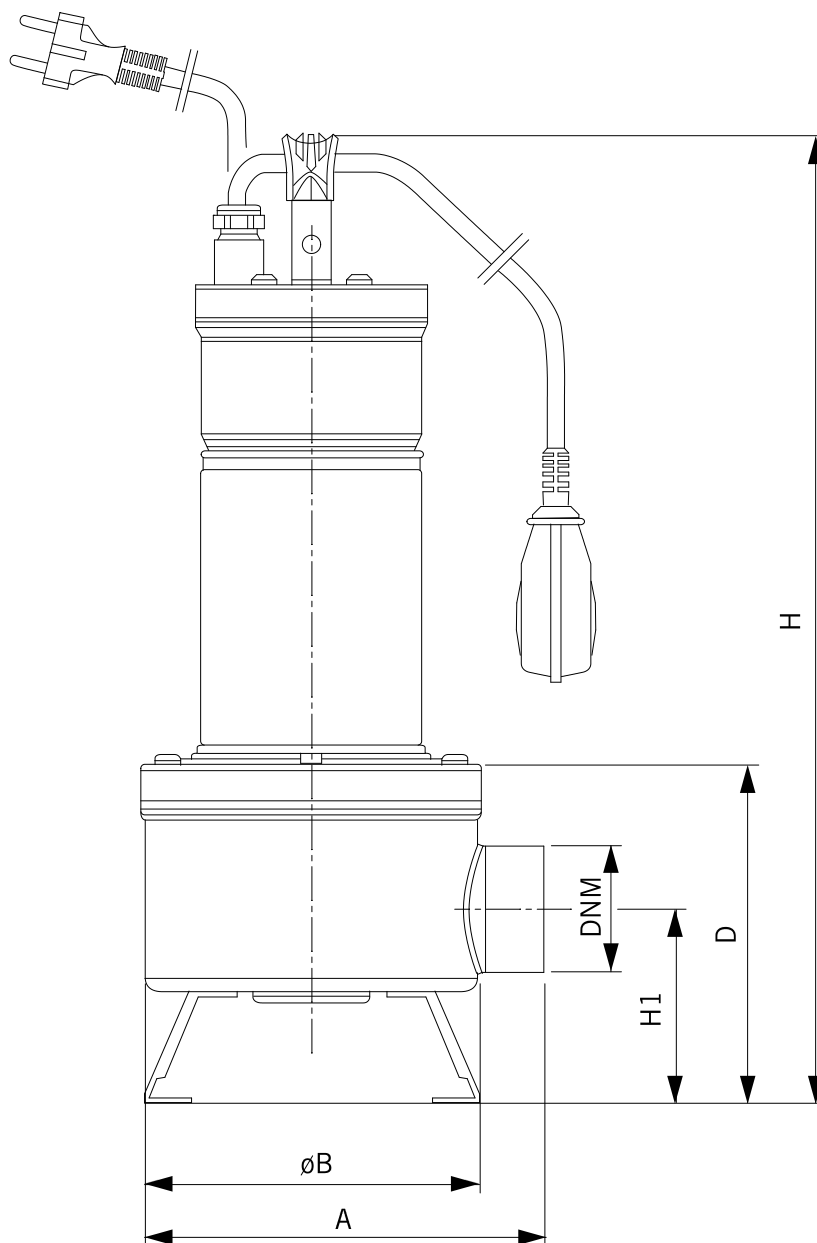

Dimensions in mm							Pump connection
1	A	203					Suction Discharge 2 " GAS --
2	B	170					
3	D	172					
4	DNM	2" F					
5	H	515					
6	H1	98					
7							
8							
9							
10							
11							
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID			OWNER_	ISSUE_DATE 2026-08-27